

P34FXL SERIES TUBE-ICE MACHINE

80 Ton per Day R404a Low-Side


The P34FXL Series with a capacity of 80 tons of ice per day is a low-side Tube-Ice machine designed to operate with a dedicated R404a high-side or on a central refrigeration system. The P34FXL will provide you with many years of dependable service.

Heavy-duty industrial construction, automatic operation, energy efficiency and the best warranty in the business make Vogt Tube-Ice machines the only "clear" choice for your ice making needs.

P34FXL Standard Features:

- ★ 25 Year Evaporator Warranty
- ★ Up to 80 tons of ice per day
- **★** Voltage 230v.,3p.,60hz.
- ✗ Control Voltage 230v.,1p.,60hz
- ¥ UL 508A Industrial Control Panel
- ★ Manufactured in accordance with A.S.M.E. code
- ★ Standard ice length 1"

P34FXL Tube-Ice Available in Three Ice Sizes:

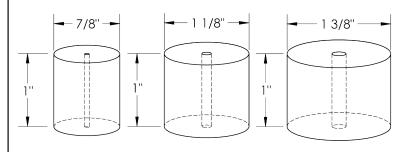

Not to Scale

Operating Conditions

The ice machine shall not be subjected to an atmospheric temperature lower than 50 ° F. (10 ° C.) nor higher than 90 ° F. (32 ° C.) without effect on performance. Water for condensing or ice making purposes shall be non-corrosive.

The water shall be at a constant pressure no less than 30lbs. at the ice machine location. The condition of the water to make satisfactory ice shall be the responsibility of the purchaser.









P34FXL Options:

- ¥ Voltage -460 v.,3p.,60hz.
- ¥ Voltage 400v.,3p.,50hz.
- **★** Voltage 575v.,3p.,60hz.
- ¥ 120v Controls
- ✤ PLC Control panel (programmable logic controller)
- * Power monitor
- ★ Cutter for 1-1/2" long ice
- * Cutter for crushed ice
- * All stainless steel
- ✓ "CE" Approval (400v, 50hz only)
- ★ Canadian Registration Number (CRN)
- ✤ R507 Operation

Vogt Ice LLC

1000 W. Ormsby Avenue Louisville, KY 40210 (800) 853-8648, (502) 635-3000 info@vogtice.com












P34FXL SERIES TUBE-ICE MACHINE

80 Ton per Day R404a Low-Side

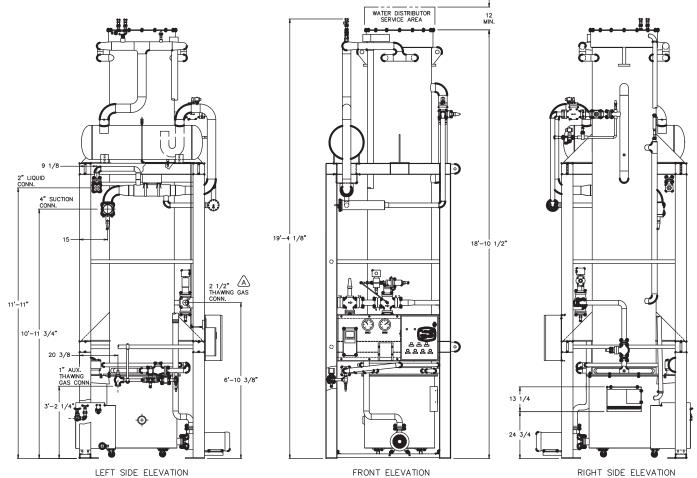

LEFT SIDE ELEVATION

	P34FXL	STANDARE	CAPACIT	Y TONS OF	ICE PER 2	4 HOURS (@ 10 ⁰ F (-1	L2 ⁰ C) SUC	TION (FLO	ODED)		
Water Temperature	7/8" Diameter Ice				1-1/8" Diameter Ice				1-3/8" Diameter Ice			
80 ⁰ F (27 ⁰ C.)	64.4				63.5				51.2			
70 ⁰ F (21 ⁰ C.)	67.2				66.5				53.8			
60 [°] F (15 [°] C.)	70.2				69.8				56.6			
50 ° F (10 ° C.)	73.6				73.4				59.8			
Shipping Weight	12,750				12,500				12,200			
Operating Weight	16,650				16,400				16,100			
	CAP	ACITY TAB	LE, TONS (OF ICE PEF	24 HOUR	S (AT SUCT	ION TEMP	PERATURE	⁰ F) (Flood	ed)		
Water Temperature	0 [°] F (-18 [°] C)			5	5 ⁰ F (-15 ⁰ C)			L5 ⁰ F (-9 ⁰ (C)	20 ⁰ F (-7 ⁰ C)		
	7/8"	1-1/8"	1-3/8"	7/8"	1-1/8"	1-3/8"	7/8"	1-1/8"	1-3/8"	7/8"	1-1/8"	1-3/8"
80 ⁰ F (27 ⁰ C.)	83.0	83.6	68.7	74.2	74.0	60.3	53.4	52.1	41.5	41.0	39.5	31.1
70 ⁰ F (21 ⁰ C.)	86.3	87.2	71.9	77.3	77.4	63.2	55.8	54.6	43.7	43.0	41.5	32.8
60 ⁰ F (15 ⁰ C.)	89.8	91.2	75.4	80.6	81.0	66.4	58.5	57.5	46.1	45.2	43.8	34.6
50 ° F (10 ° C.)	93.6	95.4	79.3	84.2	85.0	69.9	61.5	60.6	48.7	47.7	36.7	36.7
			Capacity bas	sed on 50 ga	llon blowdov	vn per cycle	with 4 minu	te harvest.				